

RTM210M

36 Cells

Mono-crystalline 9BB

210W

Power output

21.06%

The Highest Efficiency

0~+5W

Tolerance



RTM210M series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability.



High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



Anti-PID Resistance

Prominent anti-PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.



Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



Low-Light Performance


With high transmittance and anti-reflective 3.2mm tempered glass, the module has stronger performance under low light circumstances.



High Mechanical Strength

Certified to withstand: high wind load (2400Pa) and snow load (5400Pa).

0.5% Annual Degradation over 30 years

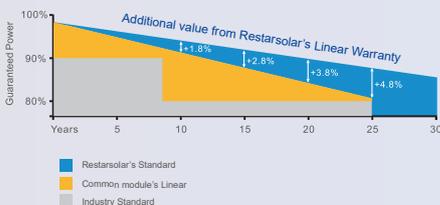

LINEAR PERFORMANCE WARRANTY


12 year Product Warranty / 30 year Linear Power Warranty

Full range of products and certification systems

ISO9001 TUV PID-FREE CE IEC61215/61730/61701/62716



Dimension of PV Modules Unit: mm

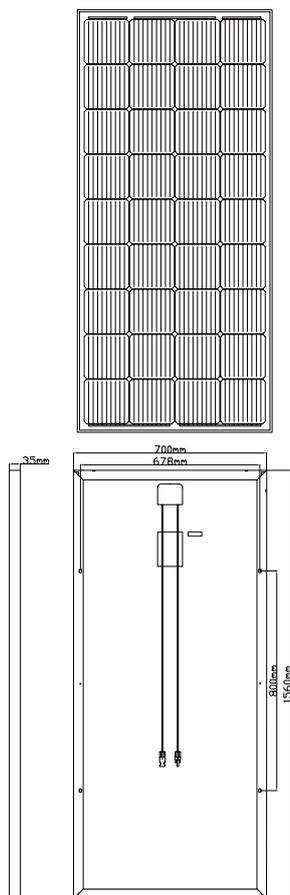

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	210W
Open Circuit Voltage-Voc(V)	23.95V
Short Circuit Current-Isc(A)	11.07A
Maximum Power Voltage-Vmp (V)	20.05V
Maximum Power Current-Imp(A)	10.47A
Module Efficiency (%)	19.23%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.



ELECTRICAL DATA(NOCT)

Maximum Power-Pmax (Wp)	156.8W
Open Circuit Voltage-Voc (V)	22.46V
Short Circuit Current-Isc (A)	8.95A
Maximum Power Voltage-Vmp(V)	18.66V
Maximum Power Current-Imp(A)	8.4A

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Mono-crystalline 166X166mm, 9 Bus bars
Cell configuration	36cells(4x9)
Module dimensions	1560x700x35mm
Weight	12KGS
Front Cover	3.2mm Tempered Glass
Frame Material	Anodized Aluminum Alloy
J-BOX	IP67 or IP68, 3 diodes
Cable	4mm ² (IEC)/12AWG(UL),900mm
Connectors	MC4 or MC4 Comparable

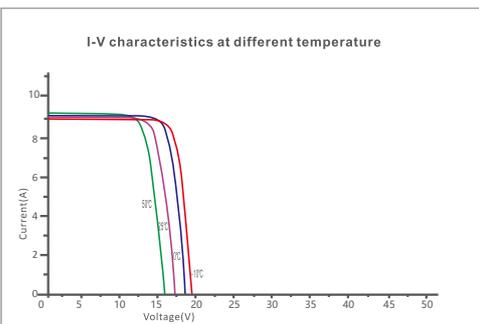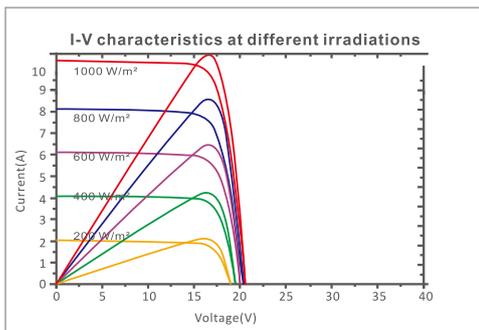

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.39%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1000V(IEC)/1000V(UL)
Max Series Fuse Rating	15A
Limiting Reverse Current	15A

PACKAGING CONFIGURATION

	40HQ	20GP
Number of modules per container	1452pcs	610pcs
Package	2pcs/carton	2pcs/carton
Package Number	726cartons	305cartons