

GECO & LESSO

N-TOPCon series

182 N-TOPCon Bifacial Module 570W ~ 595W



12 years product
workmanship warranty




30 years linear power output
warranty



1% 1st-year degradation

0.40% annual degradation

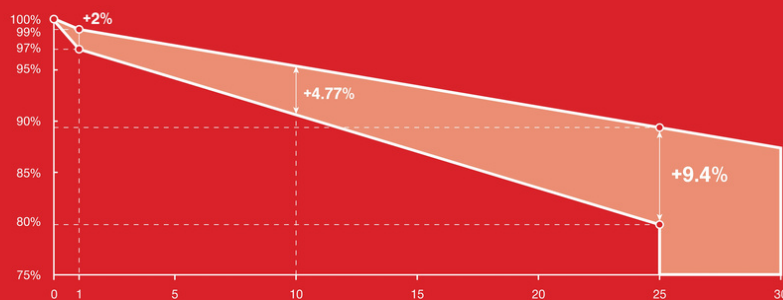

Conventional LESSO Solar Module



FEATURES AND BENEFITS



N-TOPCon brings 10-30% additional power generation comparing with conventional P-type module.



N-TOPCon solar cell has no LID naturally which can increase power generation.



Higher bifaciality, higher power output and lower BOS cost.



Double sides power output to reach higher comprehensive efficiency and get more profit.



Higher power output even under low-light environments like on cloudy or foggy days.



Higher power generation under working conditions, thanks to passivating contact cell technology.



More application scenes like BIPV, vertical installation, snowfield, high-humid, windy and dusty area.

GECO & LESSO

182 N-TOPCon Bifacial Module



Power Range
570W ~ 595W




Power Output Tolerance
0W ~ +5W



Maximum Efficiency
23.03%

Structure Performance	
Solar Cell Type	183.75R N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	144pcs(6×24)
Module Dimension	2278×1134×35mm/30mm
Weight	32.3kg(35mm) / 31.4kg(30mm)
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait ^{400mm (+)} _{200mm (-)} , landscape ^{1400mm (+)} _{1400mm (-)} Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	31pcs(35mm) / 36pcs(30mm)
Per Container(40'HQ)	620pcs(35mm) / 720pcs(30mm)


(Unit: mm)

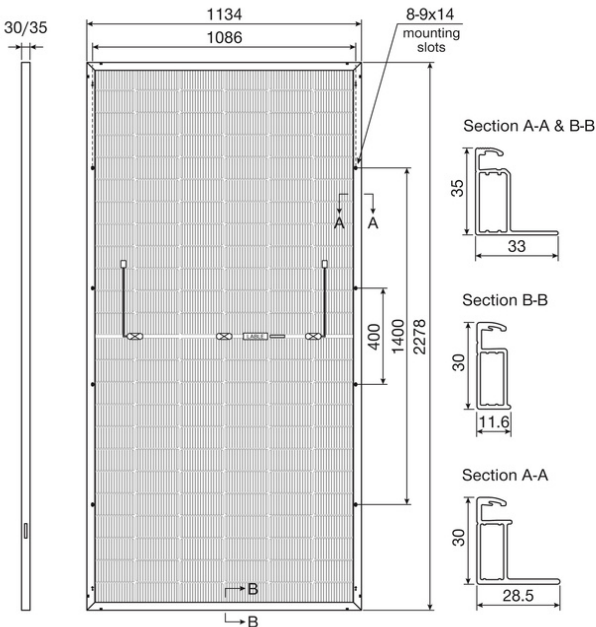

Electrical Performance Parameters STC		570C(HBD) 72(182)	575C(HBD) 72(182)	580C(HBD) 72(182)	585C(HBD) 72(182)	590C(HBD) 72(182)	595C(HBD) 72(182)
Model Type							
Nominal Max. Power	P _{max} (W)	570	575	580	585	590	595
Max. Power Voltage	V _{mp} (V)	42.45	42.60	42.75	42.89	43.04	43.18
Max. Power Current	I _{mp} (A)	13.43	13.50	13.57	13.64	13.71	13.78
Open Circuit Voltage	V _{oc} (V)	51.03	51.23	51.43	51.63	51.83	52.03
Short Circuit Current	I _{sc} (A)	14.21	14.27	14.33	14.39	14.45	14.51
Module Efficiency	(%)	22.07	22.26	22.45	22.65	22.84	23.03
Power Output Tolerance	(W)	0~+5W					

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.
* Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (595C)

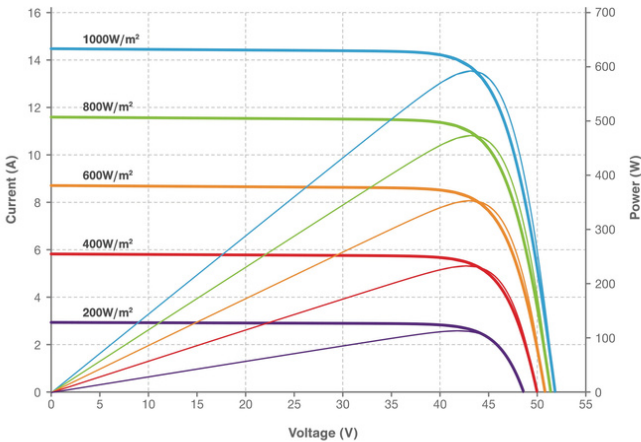

Electrical Performance Parameters NMOT		570C(HBD) 72(182)	575C(HBD) 72(182)	580C(HBD) 72(182)	585C(HBD) 72(182)	590C(HBD) 72(182)	595C(HBD) 72(182)
Model Type							
Nominal Max. Power	P _{max} (W)	429	433	437	441	445	449
Max. Power Voltage	V _{mp} (V)	39.87	40.02	40.17	40.32	40.46	40.60
Max. Power Current	I _{mp} (A)	10.76	10.82	10.88	10.94	11.00	11.06
Open Circuit Voltage	V _{oc} (V)	48.47	48.66	48.85	49.04	49.23	49.42
Short Circuit Current	I _{sc} (A)	11.46	11.51	11.56	11.61	11.66	11.71

* NMOT: Irradiance 800W/m², Cell Temperature 20°C, Wind Speed 1m/s.
* Power measurement tolerance ±3%.

Temperature Characteristics

Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{sc})	+0.043%
Temperature Coefficient (V _{oc})	-0.25%
Temperature Coefficient (P _{max})	-0.30%

Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A